


硬體規格

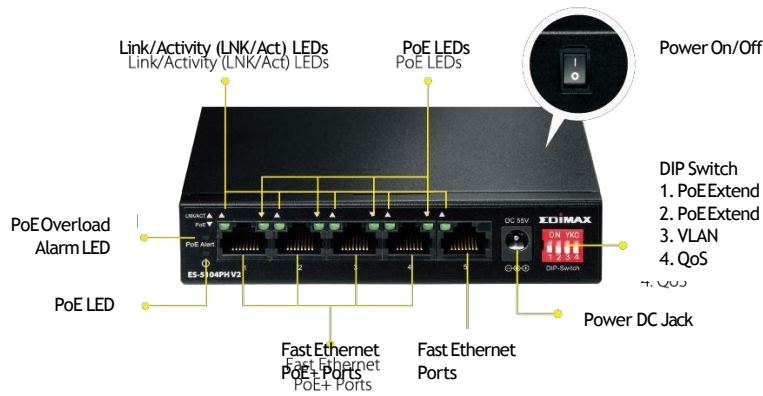

產品規格

ES-5104PH V2 長距離5埠高速乙太網路交換器(具備4 PoE+ 傳輸埠及 DIP Switch)

硬體	
網路傳輸埠	5 RJ-45 10/100Base-T ports 4 RJ-45 10/100Base-T PoE+ ports
傳輸方式	Store and forward
LED 指示燈	Power: Green LED LNK/ACT: Green LED (Port 1 - Port 5) PoE: Green LED (Port 1 - Port 4) PoE Alert: Green LED (PoE overload alarm)
風扇	無風扇
DIP Switch	PoE Extend, VLAN, QoS
供電需求	AC-to-DC external power adapter 輸入: 100-240V AC 輸出: 55V DC/1.3A (Total Power: 71.5W)
耗電量	3W
尺寸 (L x W x H)	121*75*26mm
重量	240.5g
效能	
交換器效能	1G
MAC Address	1K
Buffer Memory	56Kb
Filtering/Forwarding Rates	100Mbps port - 148,800pps 10Mbps port - 14,880pps
Power over Ethernet	
網路標準	IEEE 802.3af, IEEE 802.3at
單埠最高供電量	Up to 30W per port
Pin 腳最高供電量	1/2(+), 3/6(-)
PoE Power Budget	60W
環境	
溫度	工作: 0 ~ 40 °C 儲存: -40 ~ 70 °C
濕度 (非冷凝)	工作: 10 ~ 90% 儲存: 5 ~ 90%
標準合規性	
網路標準	IEEE 802.3 10BaseT Ethernet IEEE 802.3u 100BaseTX Fast Ethernet IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at Power over Ethernet Plus (PoE+) IEEE 802.3x Full-duplex and flow control IEEE 802.3az Energy efficient Ethernet
安規認證	FCC, CE, LVD

*本文件所記載產品之規格、功能或外觀等資訊將因產品改良而變更，實際銷售產品規格皆以官網為主，如有更改恕不另行通知

Copyright © 2018 Edimax Technology Co. Ltd. All rights reserved.